



T80 PDA HANDHELD TERMINAL

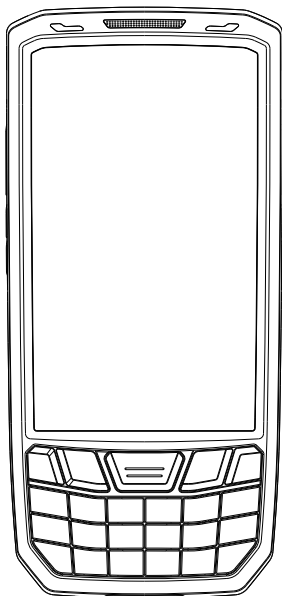

Quick Guide



OVERVIEW

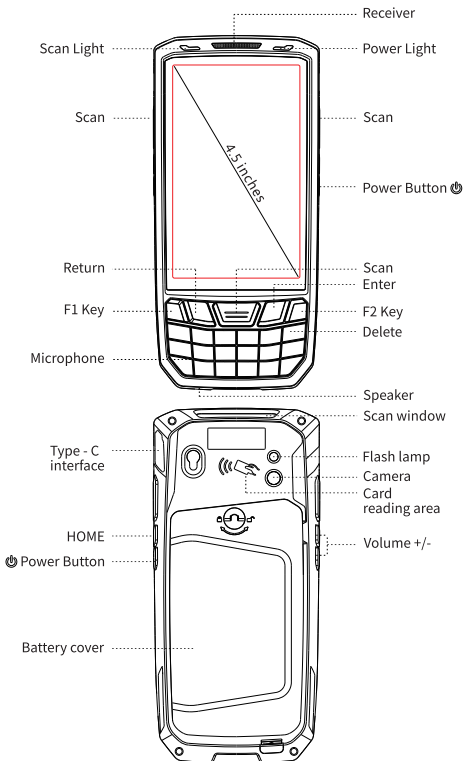

Hot button / Custom button

- 1.Screen capture : "power" + "Volume -"
- 2.Custom button : Setting → Feature → Custom Key
- 3.Letter input switching : Press "1 - A" on Keyboard

STRAP INSTALLATION

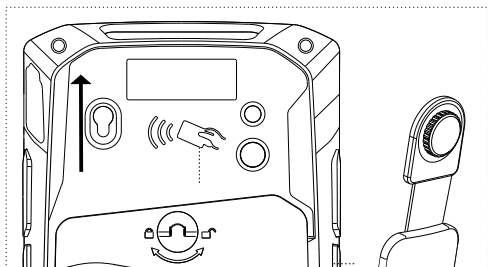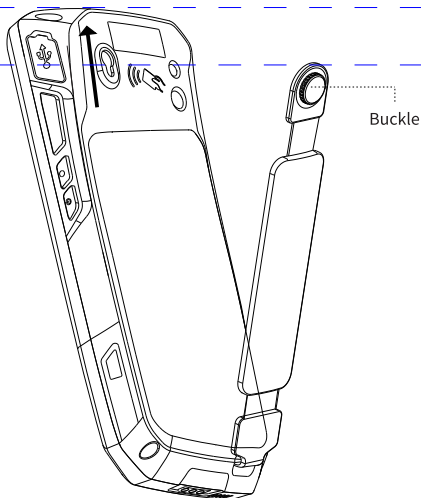


(As Pic 1)

According to the direction of the arrow in Figure 1, the hand strap buckle is pushed up to open the buckle.


OPEN THE BATTERY COVER

1. First, push the battery cover button to Anti- clockwise direction.
(As Pic1)

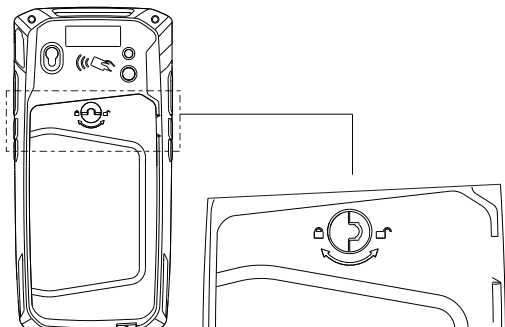

(As Pic 1)


- 2.Pull out the battery cover by using the hand position between the battery cover and the bottom case.

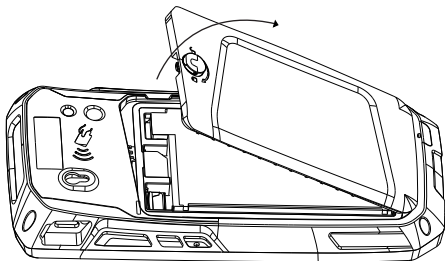


* Please remove the positive and negative insulation yellow sticker on the battery before turning on the device.

REMOVABLE BATTERY

1.First lift the strap on the battery;

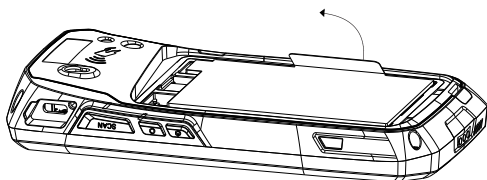


2.Then pull the battery belt to take the battery off on 45 ° angle.

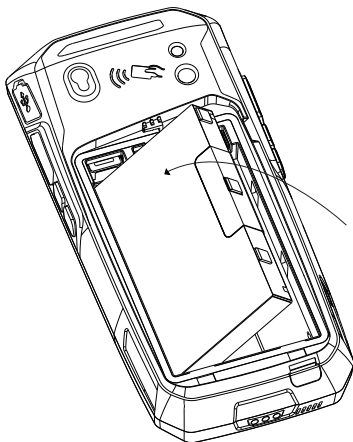


EQUIPMENT CHARGING

DEVICE CHARGING:

- 1.Pull out the waterproof USB plug on the right side with the Type-C USB cable that comes with the device.Insert the Type - C USB cable.



- 2.Use cradle to charge. (**cradle purchased separately**)



- 1.The battery can be fully charged after 4 hours of charging,and the standby time is over 48 hours.
 - 2.Cradle can charge 1 battery and 1 terminal together.
 - 3.The left indicator light is the battery charging indicator, when the battery is charging, it's red. Once full charge becomes green light.
 - 4.The right indicator light is the power-on indicator. It's green when power is on, and indicator is off when power is off.
- * To prevent the battery from being over-consumed, please charge the device when the battery power is less than 20%.If the battery has been in a over-consumption state, please charge the device for 20-30 minutes. Then it will display a normal charging status.


SCAN (OPTIONAL)

IF YOUR PDA WITH SCAN FUNCTION, **PLEASE OPERATE AS BELOW:**

- 1. Please find the “scanner” app, and open it.(As Pic 1)
- 2. In the scan interface, press scan button to scan the barcode.




(As Pic 1)



Clear the contents

Settings


About



Reset scan

Function setting:
Enter / Tab

Append prefix /
suffix

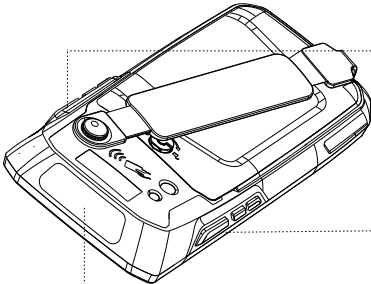

Scan key

Scan window

(* If you wanna drop the check digit,please contact seller for quick answer.)


NFC (OPTIONAL)

IF YOUR PDA WITH NFC FUNCTION, **PLEASE OPERATE AS BELOW:**


1. Please find the “NFC” app, and open it. (As Pic 1)
2. In the NFC interface, please read the card by NFC reading area.



(As Pic 1)

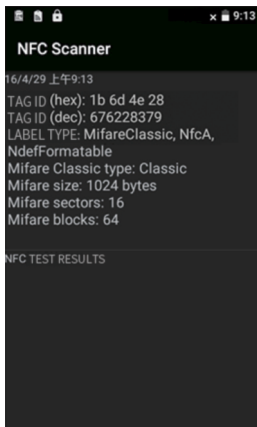

(As Pic 2)

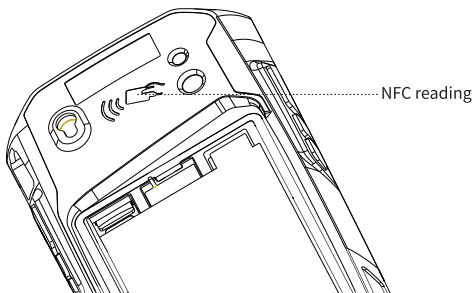


(Please note: NFC is only available for models with this function option)


OTA(UPDATE ONLINE)

OUR PDA SUPPORT OTA (UPDATE ONLINE) FUNCTION, YOU CAN UPDATE THE LATEST FIRMWARE BY OTA, OPERATE IT AS BELOW:

- 1.Please enter into “Settings” – About phone.
- 2.Press “System update” and select into the updating firmware interface.
- 3.Press “Check now” to update the OS.

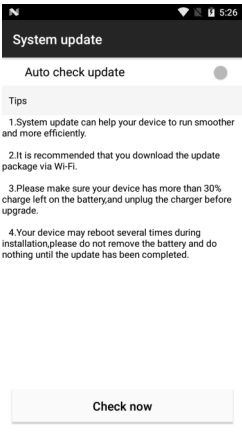

(As Pic 1)

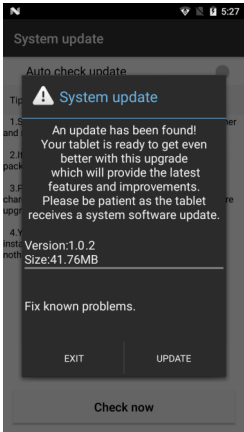

(As Pic 2)

FAQ:

1.How to restore factory settings?

Select “Setting” → “Backup&reset” → “Factory date reset”

2.Why can not open the PDA?

(1)If the new device does not turn on,please make sure the sticker on battery has been removed.

(2)Pressing the power button need about 4s , so please press the power button untill the screen showing contents .

(3)Please check if the battery have power, put the battery in PDA and charge it,if the screen shows charging icon,charge the PDA for some time and restart it.

3.PDA can not connect the PC?

If you connect the PDA with your PC , and no prompt messages appear, please change another cable to test, if not work, please change another pc.

4.When use scanner , there is no data but scan-light on,Why?

(1) Go to scan setting , and check “keyboard output” .

(2) If checked ,then please reset the scan demo for twice,and operate “OFF” -- “ON” .

5.The device cannot scan the code.

(1) Check each scan button can be used normally.

(2) Check the scan engine supports the bar code.

(3) Check the scanning lens and bar code is clear and unobstructed.

(4) Check the scan setting and reset .

6.The device can not charge.

(1) Check the device adapter and charging port are good.

(2) If the device is not used for a long time, please keep it charged for 30 minutes. Then check the device lights on or not.

(3) Replace the battery of the device that can be turned on normally, check the problem on battery or device.

7.How to use the battery correctly?

The battery is Li-ion battery,If no power , please immediately charge it, Don't keep the battery with full power or no power for longtime,The best way is keep 50% power of the battery to store it.And if you don's use the PDA for longtime,please pull out the battery from PDA and store it.

COMMITTED TO THE WORLD OF THINGS , CREATING A SMART LIFE